


LIVING-LIGHT



CATALOGUE
2023-2024

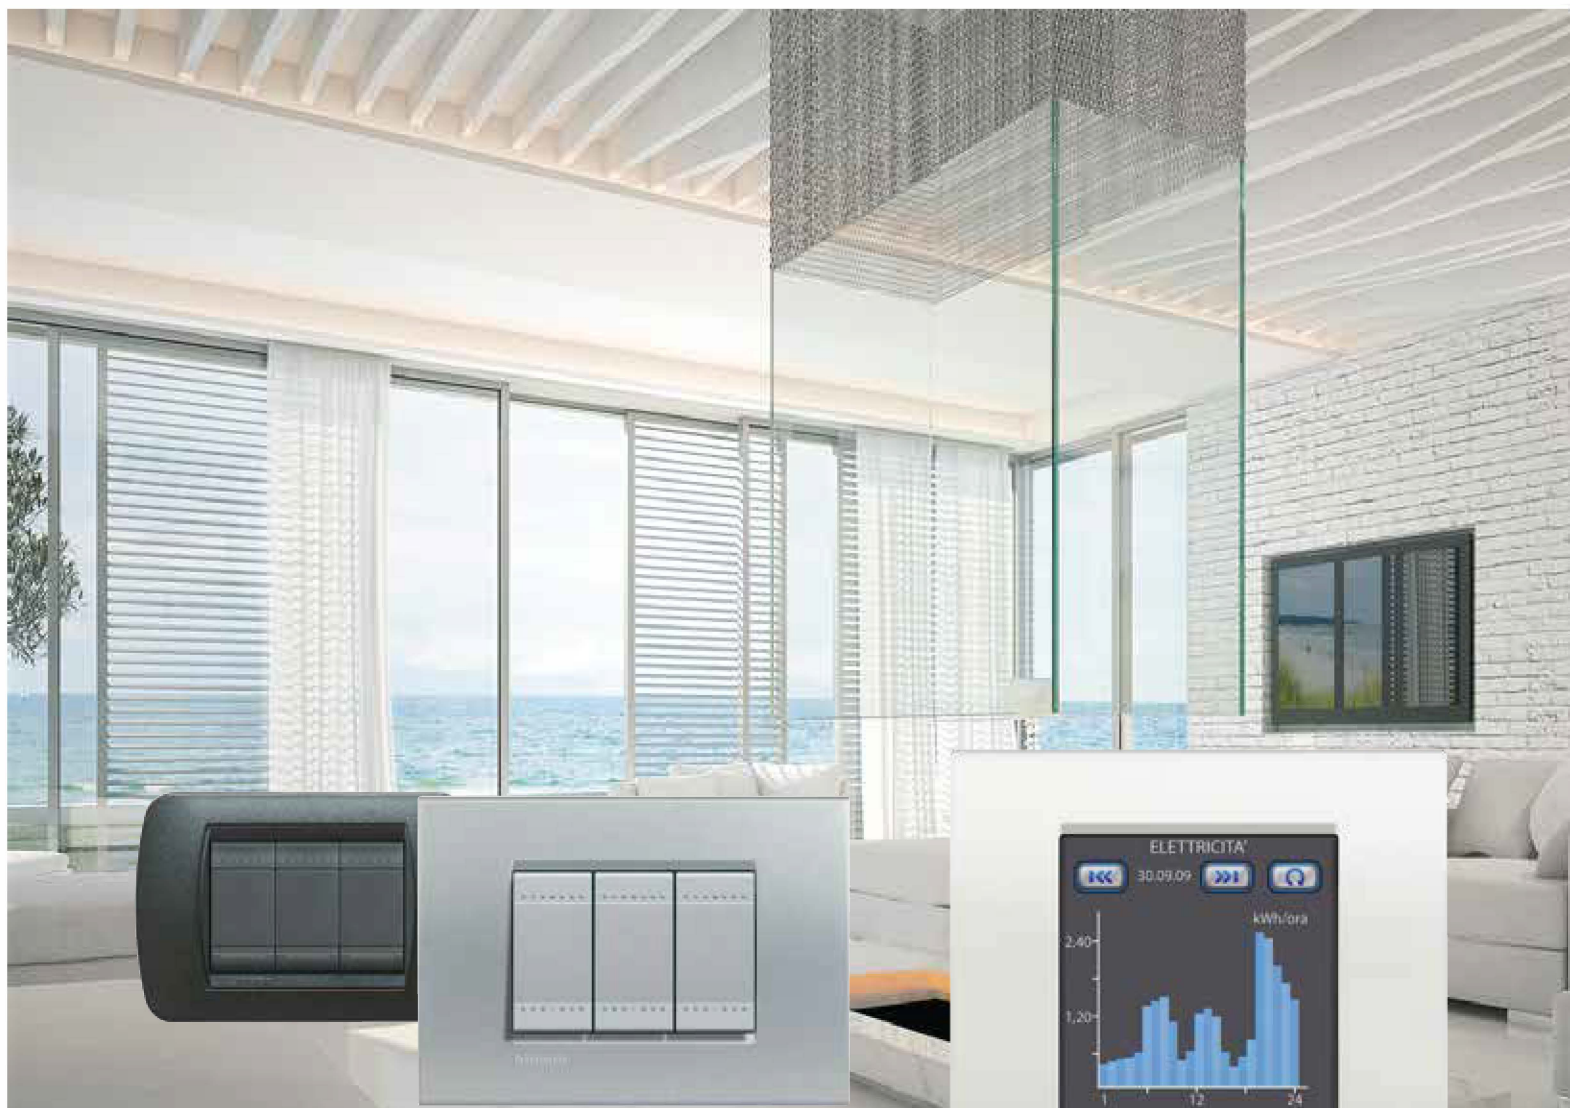

bticino


LIVING-LIGHT

In one single range


Three key finishes: white, tech, anthracite

More than 50 plate finishes in 3 designs

All fully interchangeable

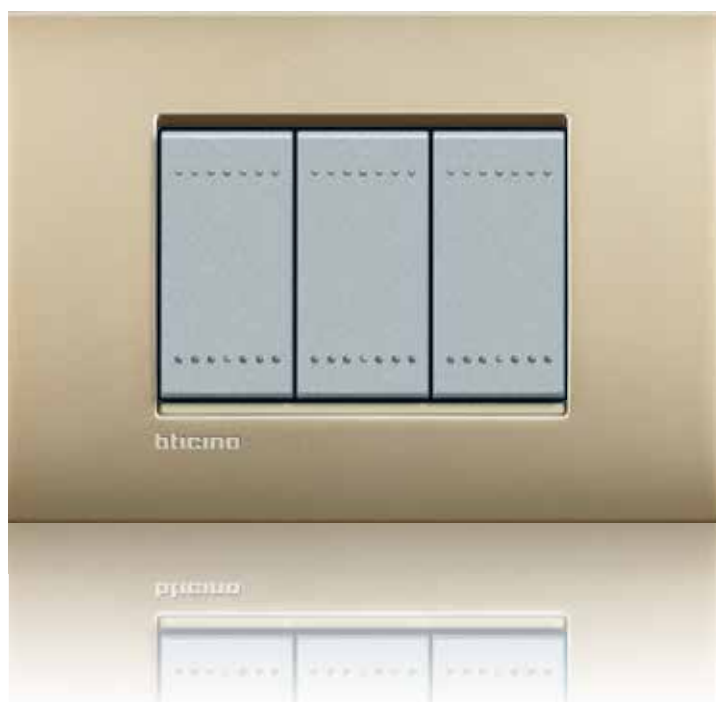

AIR COVER PLATES

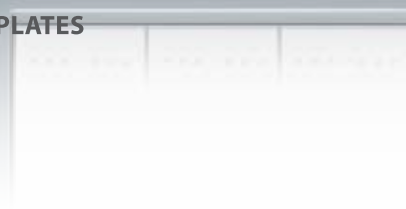




LIVING INTERNATIONAL COVER PLATES



LIGHT COVER PLATES

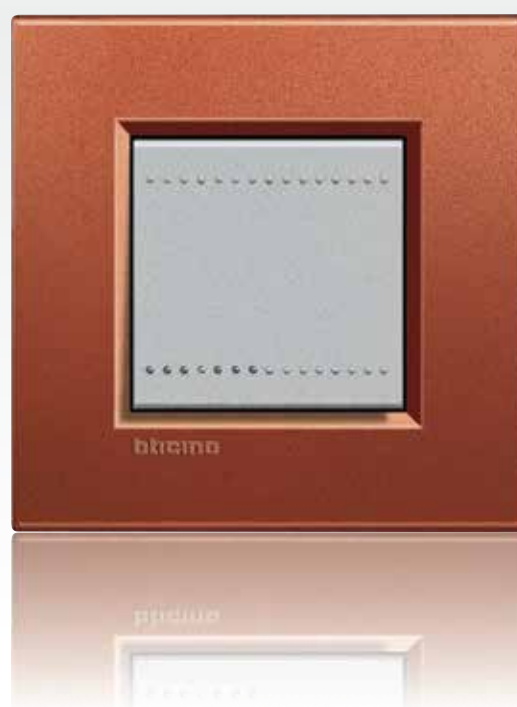


THE MOST FLEXIBLE AND MODERN PLATFORM

ALL POSSIBLE INSTALLATION




THE BEST PLATFORM

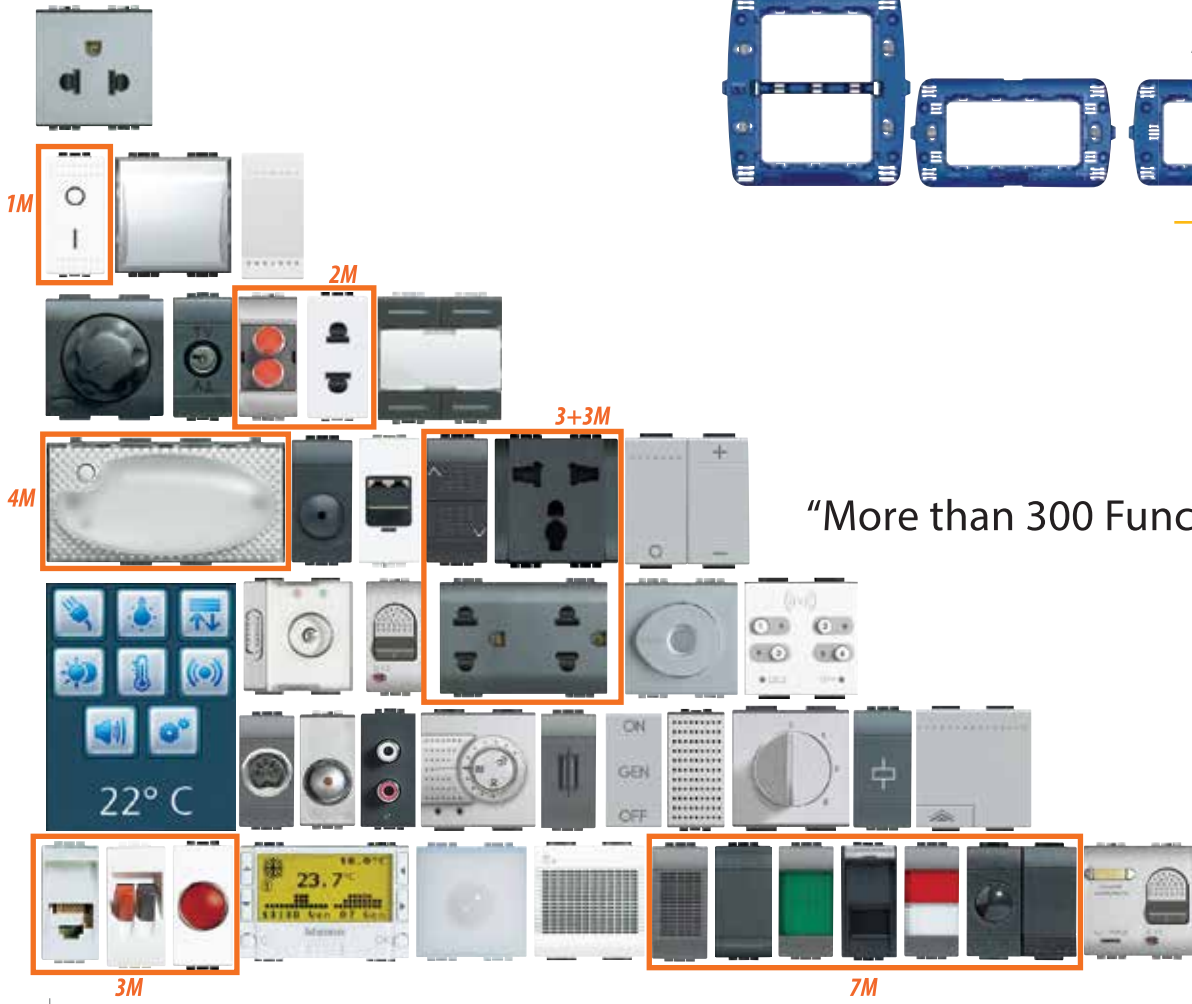

LIGHT

More modern lines resulting of the best trends of contemporary style.

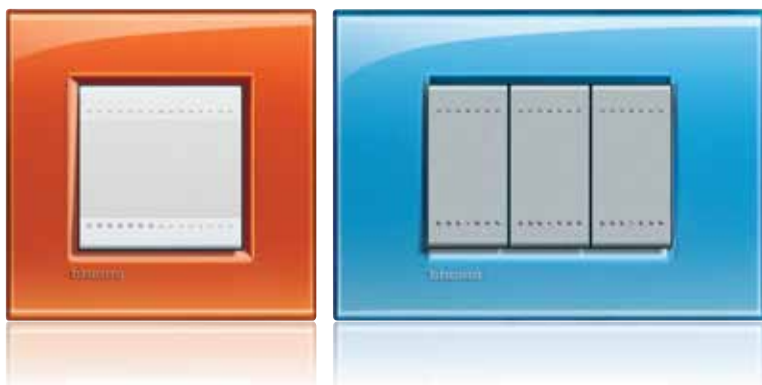

LIVING INTERNATIONAL

Soft and rounded shapes for a timeless design.



ALWAYS BE MODULAR



More than 300 functionalities

DESIGN: CHOOSE ITALIAN REFINEMENT



LIGHT cover plate




LIVING INTERNATIONAL cover plate

LIGHT^{AIR}

The thin art of perfection

Blue moon

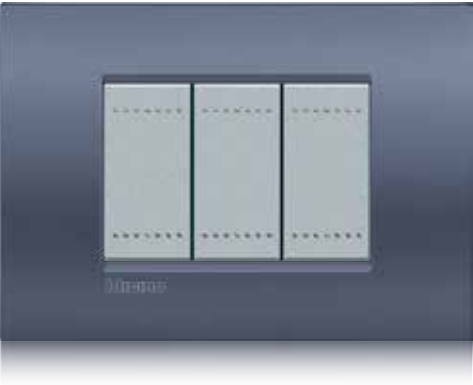

Satin gold



SOFT

Exclusive opaque finishes that harmonize perfectly with the current trends in interior design. (Street, Clay, Sand, Blue Moon)

Lava



BRIGHT

Finely treated metal for a reflective and satin surface (Peltrum, Palladium, Satin Gold, Satin Nickel).

NEUTRAL

Materials to match the finishes of the keys (Lava, Pearl white, Moon silver).




THE MOST ADVANCED SOLUTION SOLD IN MORE THAN 100 COUNTRIES

Door entry system



Switches

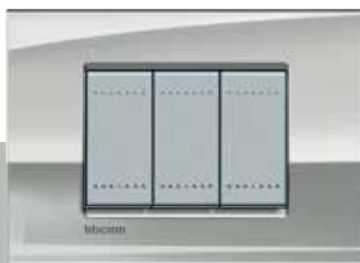

Temperature Control



Dimmer



Power socket



Weatherproof box



Scenario control unit



Switches

IN THE HOTEL LIKE AT HOME

A complete offer for a state of the art electric system
also in the hotel room

➤ Maximum attention to customer requirements in terms of:

- available services
- comfort
- simple interaction with products and functions.

The BTicino Hotel range has been conceived for pleasant hotel stay, making guests feel as if they were in their own homes.



Inside the room: "do not disturb – make up the room" pushbuttons, and supply badge pocket (network ON)

IMMEDIATELY AT EASE

The presence of a badge holder socket invites the guest to immediately interact with the room services on offer. To be left undisturbed simply press the "do not disturb" control.



BEDSIDE PANEL



Thanks to the MY HOME scenario control at the side of the bed, a simple touch is enough to create the desired atmosphere, adjusting lights, temperature, blinds and curtains.



Razor socket



Path Markers Light



Emergency light



**EACH FUNCTION CAN BE
RECOGNISED IMMEDIATELY**

A range of simple and intuitive symbols make each control recognisable and, and make it easier for the customer to interact with the available functions.



*Curtain adjustment,
Bedside and Master
lights management*

**CONNECTION, ENTERTAINMENT,
AND MULTIMEDIAITY**

A range of products dedicated to audio/video connections provide the desired level of entertainment and relax.



*HDMI and USB connector for
managing readers and electronic
devices such as DVDs, digital
cameras, MP3 readers*

TECHNOLOGY AND FLEXIBILITY IN THE OFFICE

The whole network at your fingertips: from electric distribution to the structured cabling for the management of data and audio/video signals

MAXIMUM INTEGRATION

LIVINGLIGHT can be installed in all the Interlink solutions: column, workstations, protruding towers and underfloor boxes.



Pop up



Workstation



Desk workstation



New RJ45 toolless connectors



Wi-Fi Access Point

MEETING ALL CONNECTION NEEDS

Full design coordination of LIVINGLIGHT with various systems:

- BTNET, structured cabling system
- distribution of data and audio/video signals
- wireless extension of the data network with Wi-Fi Access Point.



Green Switch/ Audio and video connectors/ Dimmer

CONTENTS




WIRING DEVICES CATALOGUE

Basic control devices	10
Metal key covers	11
Other control devices	12
Green switch and electronic control devices	13
Dimmers	14
Socket outlets	16
TV-telephone sockets & RJ connectors	17
Audible and luminous signalling devices	18
Electrical safety devices/ Temperature control	19
Multimedia sockets	20
Hotel offer range	21
Accessories	22
Special installation	24
Light cover plates	26
Kristall cover plates	29
Living international cover plates	30
LIGHT ^{AIR} cover plates	32
Installation system	34

NOTE: the new codes are shown in the catalogue in orange.

BASIC CONTROL DEVICES

ROCKER CONTROLS

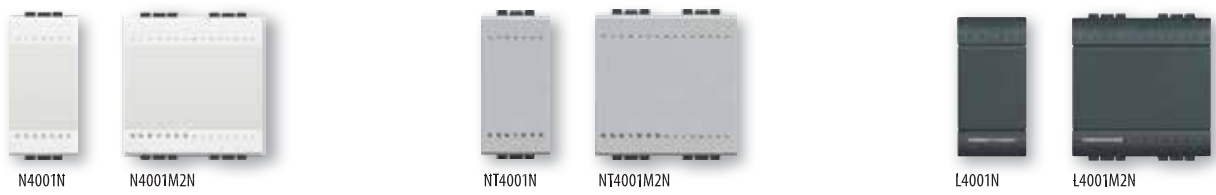

		1 WAY SWITCH 1P 16 AX 250Vac	2 WAY SWITCH 1P 16 AX 250Vac	4 WAY SWITCH 1P 16 AX 250Vac	PUSHBUTTON 1P (NO) 10 A 250Vac	PUSHBUTTON 1P (NC) 10 A 250Vac	PUSHBUTTON 2P (NO) 10 A 250Vac with independent contacts
1 MODULE		N4001N	N4003N	N4004N	N4005N	N4034N	N4044N
		NT4001N	NT4003N	NT4004N	NT4005N	NT4034N	NT4044N
		L4001N	L4003N	L4004N	L4005N	L4034N	L4044N
2 MODULE		N4001M2N	N4003M2N	N4004M2N	N4005M2N		
		NT4001M2N	NT4003M2N	NT4004M2N	NT4005M2N		
		L4001M2N	L4003M2N	L4004M2N	L4005M2N		
3 MODULE		L4001/0 + N4915M3N	L4003/0 + N4915M3N	LN4004 + N4915M3N	L4005/0 + N4915M3N		
		L4001/0 + NT4915M3N	L4003/0 + NT4915M3N	LN4004 + NT4915M3N	L4005/0 + NT4915M3N		
		L4001/0 + L4915M3N	L4003/0 + L4915M3N	LN4004 + L4915M3N	L4005/0 + L4915M3N		

AXIAL CONTROLS



		1 WAY SWITCH 1P 16 AX 250 Vac	2 WAY SWITCH 1P 16 AX 250Vac	4 WAY SWITCH 1P 16 AX 250Vac	PUSHBUTTON 1P (NC) 10A 250Vac
1 MODULE		N4051N	N4053N	N4054	N4055N
		NT4051N	NT4053N	NT4054	NT4055N
		L4051N	L4053N	L4054	L4055N
2 MODULE		N4051M2N	N4053M2N	N4054M2	N4055M2N
		NT4051M2N	NT4053M2N	NT4054M2	NT4055M2N
		L4051M2N	L4053M2N	L4054M2	L4055M2N

NEUTRAL CONTROLS

1 WAY SWITCH 1P 16 AX 250Vac	2 WAY SWITCH 1P 16 AX 250Vac	4 WAY SWITCH 1P 16 AX 250Vac	PUSHBUTTON 1P (NO) 10 A 250Vac
L4001/0	L4003/0	LN4004	L4005/0



L4001/0

NEUTRAL LIGHTABLE KEY COVERS

Description	1 module		2 modules	3 module
		item	item	item
NEUTRAL KEY COVER WITH LIGHTABLE BOTTOM SECTION		N4915N	N4915M2N	N4915M3N
		NT4915N	NT4915M2N	NT4915M3N
		L4915N	L4915M2N	L4915M3N
KRISTALL CUSTOMIZABLE TRANSPARENT KEY COVER		N4932	N4932/2	N4932/3



METAL KEY COVERS

		METAL KEY COVER WITH LIGHTABLE BOTTOM SECTION 4 FINISHES FOR USE WITH SQUARE METALS COVER PLATES		
		1 module	2 modules	3 module
Finish Description		item	item	item
ICE GOLD	○	LN49310A	LN4931M20A	LN4931M30A
BRONZE	○	LN4931BZ	LN4931M2BZ	LN4931M3BZ
NICKEL	○	LN4931NS	LN4931M2NS	LN4931M3NS
SILVER	○	LN4931AG	LN4931M2AG	LN4931M3AG
GOLD	○	LN49310C	LN4931M20C	LN4931M30C
DARK STEEL	○	LN4931AC	LN4931M2AC	LN4931M3AC
TITANIUM	○	LN4931TC	LN4931M2TC	LN4931M3TC
CHROME	○	LN4931CR	LN4931M2CR	LN4931M3CR


LN49310A


LN4931BZ


LN49310C


LN4931AC


LN4931NS


LN4931AG




LN4931TC


LN4931CR


CUSTOMIZED KEY COVER

Key cover with 3 zones
to be customized

	1 Module	2 Modules	3 Modules
1 Module	☐ N4915NC ☐ NT4915NC ☐ L4915NC	☐ N4915M2NC ☐ NT4915M2NC ☐ L4915M2NC	☐ N4915M3NC ☐ NT4915M3NC ☐ L4915M3NC

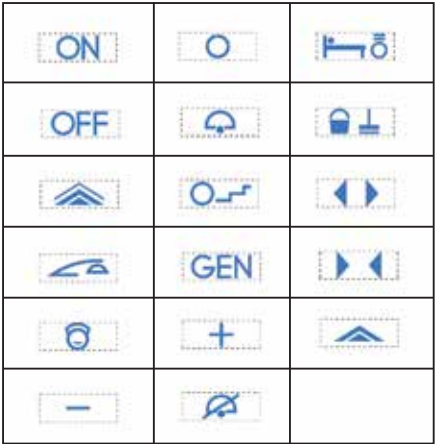

HOW TO BUILD A 3 MODULE 1 WAY SWITCH

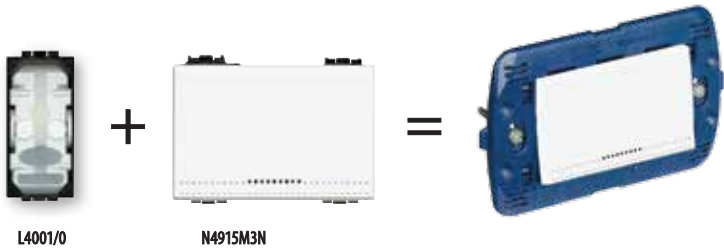

OTHER CONTROL DEVICES



N4002N

N4012

N4011



L4038R

L4038V

NT4033

L4037

16 AX 250 Va.c. DOUBLE-POLE SWITCH	
☐ N4002N ☐ NT4002N ☐ L4002N	2 P switch
☐ N4012 ☐ NT4012 ☐ L4012	2 P key switch - the key can be removed both in the ON and in the OFF position - keys are different from each other
☐ N4012C* ☐ NT4012C* ☐ L4012C*	2 P key switch - as above - keys are the same for all devices

* NOTE: item available to order. Contact your supplier for availability

32 A DOUBLE-POLE SWITCH	
☐ N4011 ☐ NT4011 ☐ L4011	32 A - 250 Va.c. 2P switch



NT4022

NT4027

NT4016

16 AX 250 Va.c. TWO-WAY SWITCH	
☐ N4022 ☐ NT4022 ☐ L4022	1 P key switch - the key can be removed both in the ON and in the OFF position - keys are different from each other
☐ N4022C* ☐ NT4022C* ☐ L4022C*	1 P key switch - as above - keys are the same for all devices

* NOTE: item available to order. Contact your supplier for availability

ROTARY SWITCH	
☐ N4016 ☐ NT4016 ☐ L4016	selector - 1 way rotary switch - 4 positions for controlling air conditioners, fans control, etc. - 3 A 250 Va.c.

16A 250 Va.c. CHANGEOVER SWITCH	
☐ N4027 ☐ NT4027 ☐ L4027	1 P 1-0-2 double - key changeover switch

10 A 250 Va.c. PUSHBUTTONS

☐ N4036 ☐ NT4036 ☐ L4036	1 P (NO) + 1 P (NO) double pushbutton
☐ N4037 ☐ NT4037 ☐ L4037	1 P (NO) + 1 P (NO) interlocked double pushbutton
☐ N4033 ☐ NT4033 ☐ L4033	1 P (NO) cord pushbutton
☐ N4038R ☐ NT4038R ☐ L4038R	1 P (NO) pushbutton + lampholder for LEDs item LN4742V12T - LN4742V127T - LN4742V230T - red diffuser
☐ N4038V ☐ NT4038V ☐ L4038V	as above - green diffuser



LN4040

☐ LN4040	1 P (NO) pushbutton + lightable nameplate with LEDs item LN4742V12T - LN4742V127T - LN4742V230T
---------------------------------	--



NT4341/34

NT4330/230

MONOSTABLE RELAYS	
☐ N4330/230 ☐ NT4330/230 ☐ L4330/230	monostable relay with NO/NC contact 250 Va.c. 10 A (resistive) 4 A (inductive) cosφ 0.5 coil power supply 230 Va.c.

ELECTRONICALLY HELD CYCLIC RELAYS

☐ N4341/34 ☐ NT4341/34 ☐ L4341/34	circuit breaker cyclic relay 10 AX 250 Va.c. - 3/4 wires
--	--

GREEN SWITCH AND ELECTRONIC CONTROL DEVICES



L4433N



N4434N



L4432



NT4431

GREEN SWITCH	
☐ N4433N ☐ NT4433N ☒ L4433N	Green Switch: switch with movement sensor, through a combination of passive infrared rays and ultrasounds, and brightness sensor. Manual switching on of the light using the front pushbutton, and automatic switching off based on brightness levels and movement. Switch off delay and brightness sensor threshold adjustable using the one/two-way (BMS04003 and BMS04001) remote control, 230 Va.c. power supply - 2.5 A relay output - 2 modules
☐ N4434N ☐ NT4434N ☒ L4434N	Green Switch: switch with passive infrared movement sensor - brightness sensor with adjustable threshold and adjustable switch off delay time - manual switching on of the light using the front pushbutton, and automatic switching off based on brightness levels and movement - 2.5 A resistive/inductive relay output - 230 Va.c. power supply - 2 modules
☐ BMS04001	two-way IR remote control for the selection of the N/NT/L4434N sensor parameters. The device is fitted with a display for the acquisition of the currently set values, and the modification of the main parameters, such as: brightness level, switch off delay time, operating mode and sensitivity.
☐ BMS04003	one-way IR remote control for the selection of the N/NT/L4434N sensor parameters. It enables the selection of the main parameters, such as: brightness level, switch off delay time, operating mode and sensitivity.

PASSIVE IR SWITCHES	
☐ N4431 ☐ NT4431 ☒ L4431	switch with passive IR movement detector - adjustable threshold twilight circuit with possibility of exclusion - switch off time delay circuit, adjustable from 3 seconds to 10 minutes - relay output 2 A resistive / 2 A inductive - power supply 230 Va.c. - 1 module
☐ N4432 ☐ NT4432 ☒ L4432	as above - switch off delay time circuit, with delay adjustment from 30 seconds to 10 minutes - it can also be activated using the external pushbutton - relay output 6 A resistive/2 A inductive - with 0-A-I selector - power supply 230 Va.c. - 2 modules

NOTE: for more information on remote controls BMS04003 and BMS04001 refer to the Lighting Management Catalogue.

NOTE: ☐ White colour device

☒ Tech colour device

☒ Anthracite colour device

☐ Neutral item

GREEN SWITCH: ILLUMINATION ONLY WHEN NEEDED

Green Switch is the intelligent solution for **managing lighting without waste** in the residential and service sectors.



ECO MODE

The load is switched on manually and switched off automatically by the sensor, depending on the daylight level and the presence detection.

You choose to switch on the light



- 1) Light level detection
- 2) Presence detection



Auto off



UP TO
55%
SAVINGS

IN COMPLIANCE WITH
EN15193 STANDARD

On ————— Off



AUTO MODE

The switching on and off of the load are ordered automatically by the sensor, depending on movement detection and the desired lighting levels.



Light level detection



Auto off



On ————— Off

DIMMERS

For an efficient management of all types of loads

NEW

NEW UNIVERSAL DIMMER

With the new BTicino universal dimmers it is possible to control and adjust the light intensity of all types of loads on the market, from traditional incandescent lamps, to the latest generation LED and CFL energy saving lamps that, as required by the regulations, will soon replace them.



COMFORT:

- thanks to the new universal dimmer, it is possible to adjust the light intensity, obtaining the optimum light conditions for each situation
- its ergonomics and the user interface are simple and intuitive, with dedicated pushbuttons for switching on/off, and +/- level adjustment
- a simple touch is enough to switch the light on at a preset level (33% or 66%)

INSTALLATION ADVANTAGES:

- thanks to the possibility of managing all kinds of loads, the device may be installed before selecting the lamps
- wiring only requires 2 wires (no neutral wire necessary), saving time during the installation
- as the neutral is not necessary, it can be easily installed in replacement of traditional existing dimmers or controls
- it can be controlled by one or more remote pushbuttons


ADD PUSH BUTTONS FOR MORE CONTROL POINTS



Dimmer Control



Additional push button

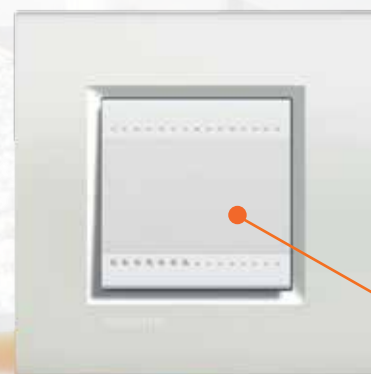

Additional push button

"Press and dim"

DIMMERS



N4402N


NT4408N
NT4410N
NT4411N

Item

KNOB DIMMER

- ☐ N4402N*
- ☐ NT4402N*
- ☐ L4402N*



knob dimmer with built-in two way switch
- resistive 60-500 W
- TRIAC/IGBT technology - built-in fuse
- 1 module

Item

TOUCH DIMMER

- ☐ N4408N
- ☐ NT4408N
- ☐ L4408N



resistive/inductive touch dimmer 300/600 W
with electronic protection - 2 modules



UNIVERSAL PUSHBUTTON DIMMER

- ☐ N4411N
- ☐ NT4411N
- ☐ L4411N



universal dimmer (resistive - inductive,
capacitive, fluorescent compact and dimmer
LEDs) - 150/200/400 W with electronic protection
- 2 modules

*NOTE: when installing dimmers with AIR plates, for optimum look result and planarity of the light point, the use of the new pushbutton dimmers is recommended (E.g. L/N/NT4411N). Alternatively, if installing the L/N/NT4402N and L/N/NT4406, the use of the box extension is recommended, as it will make wiring easier.

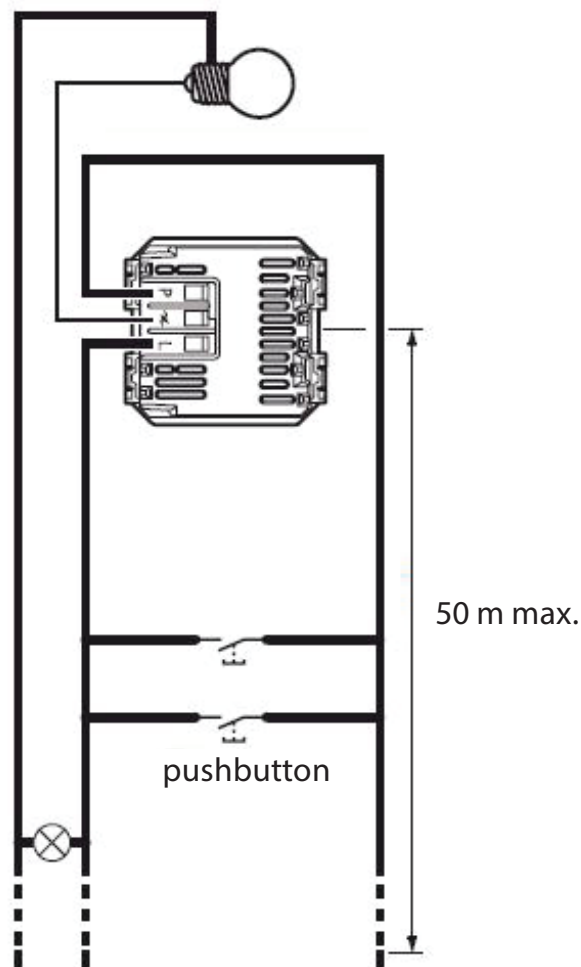

Loads

Item	Type	range	supply std	Incandescents and halogens	Halogens with ferromagnetic transformer	Halogens with electronic transformer	Dimmerable compact fluorescents	Dimmerable LED lamps	Fluorescents with electronic 0-10 V ballast
N4402N NT4402N L4402N	Resistive	230 Va.c. 50 Hz	230 Va.c.	60 - 500 W					
N4408N NT4408N L4408N	Resistive Inductive	100 - 240 Va.c. 50 - 60 Hz	240 Va.c. 100 Va.c.	20 - 600 W 20 - 300 W	20 - 600 VA 20 - 300 VA				
N4411N NT4411N L4411N	Universal	100÷240 Va.c. 50÷60 Hz	240 Va.c. 100 Va.c.	3 ÷ 400 W 3 ÷ 200 W	3 ÷ 400 VA 3 ÷ 200 VA	3 ÷ 400 VA 3 ÷ 200 VA	3 - 150 VA 3 - 75 VA	3 - 150 VA 3 - 75 VA	

SOCKET OUTLETS



NT4125



NT4126



L4185



L4139



L4285C2



L4285C1



LN4285CW2

Item

EURO-AMERICAN STANDARD

□ N4129S
■ NT4129S
■ L4129S



2 P+E 15 A 127/250 Va.c. socket - unshielded tulip contacts - 1 module

□ N4125
■ NT4125
■ L4125



2 P 16 A 127/250 Va.c. socket - Ø 5 mm shielded tulip contacts - 1 module

□ N4126
■ NT4126
■ L4126



2 P+E 16 A 127/250 Va.c. universal simplex socket - Ø 5 mm unshielded tulip contacts - 2 modules

□ N4185
■ NT4185
■ L4185



2 P+E 16 A 127/250 Va.c. universal duplex socket - shielded tulip contacts - 3 modules

COLORED SOCKET

■ N4185R



2 P+E 16 A 127/250 Va.c. universal duplex socket - shielded tulip contacts - 3 modules colour red

○ L4140/16R



2 P+E 16 A 250 Va.c. socket - centre distance 19 mm contacts ; earth side contacts for German standard plugs; suitable for: 2 P and 2 P+E 10/16 A Italian standard plugs, 2 P+E 16 A German standard plugs - colour red

MULTISTANDARD

□ N4139
■ NT4139
■ L4139



2 P+E 5/6/10/13 A 250 Va.c. and 127 Va.c. socket - multistandard - 2 modules

□ N4140/16
■ NT4140/16
■ L4140/16



2 P+E 16 A 250 Va.c. socket - centre distance 19 mm and 26 mm in 2-centre configuration - protected tulip contacts ; earth side contacts for German standard plugs; suitable for: 2 P and 2 P+E 10/16 A Italian standard plugs, 2 P+E 16 A German standard plugs

USB CHARGER

□ N4285C1
■ NT4285C1
■ L4285C1



USB connector 5 Vd.c. to recharge electronic devices as mobiles, smartphone, tablet and similar, up to 1,100mA. Power supply 230 Va.c.

□ N4285C2
■ NT4285C2
■ L4285C2



USB connector 5 Vd.c. to quick recharge of a single electronic devices as mobiles, smartphone, tablet and similar, up to 2,400 mA, or simultaneous recharge of two devices up to 1,200 mA. Power supply 230 Va.c.

INDUCTION CHARGER

○ LN4285CW2




Induction charger, with 2.400 mA USB charging port. It allows fast and wireless charging of smartphones equipped with an induction receiver. Suitable for bed head, sideboards, desks, work environments. Complies with the WPC Qi standard (World Power Consortium) and the EN62479 standard (ECM emission). It meets the needs of people's protection in the field of electromagnetic fields and does not disturb other radio transmissions (Zigbee, TNT, GSM 4G, ...). It is equipped with 2 50x80 mm induction antennas that guarantee a quick coupling of the smartphone. The anti-slip surface is inclined by 10°. Anti-theft "lock" function. Energy efficiency > 85%. Equipped with a 2400 mA type A USB port to power a second device. 12W. Size 136.5 x 70 x 56.5 mm



Safety Shutter

Contacts

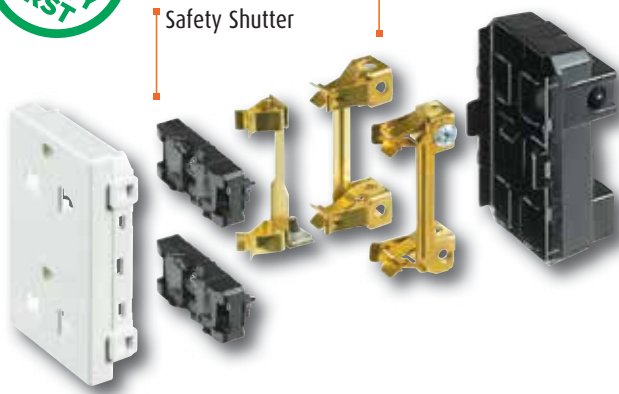

TV - TELEPHONE SOCKETS



Item	STANDARD TV SOCKETS
☐ N4269T ☐ NT4269T ☐ L4269T	 shunted coaxial jack antenna system - 1 mod (Female)

Item	SCREENED TV SOCKETS
☐ LN4202D	 shunted coaxial jack - Ø 9.5 mm - male jack - 1 module - screened TV + SAT sockets in die-casting housing with current flow


Item	TYPE F TV SOCKETS
☐ LN4202F	 type F TV female connector - 75 Ω impedance - screw coupling - 1 modules

Item	PLUGS AND TERMINAL RESISTANCE
☐ S2133	 mobile TV plug and jack - Ø 9.5 mm - white - for TV + SAT jacks and L/N/NT4206D
☐ 75RTN	 terminal resistance for lines closing with 75 Ω impedance in installations with cascade connection - to be added to the last pass-through jack

TELEPHONE CONNECTORS

Item	RJ11 TELEPHONE CONNECTORS				
☐ N4258/11N ☐ NT4258/11N ☐ L4258/11N	These connectors have been designed for meeting the requirements of telephone connections. <table border="1"> <thead> <tr> <th>Jack type</th><th>Connection type</th></tr> </thead> <tbody> <tr> <td>RJ11</td><td>Toolless</td></tr> </tbody> </table> 	Jack type	Connection type	RJ11	Toolless
Jack type	Connection type				
RJ11	Toolless				

EFFECTIVE - EXCLUSIVE

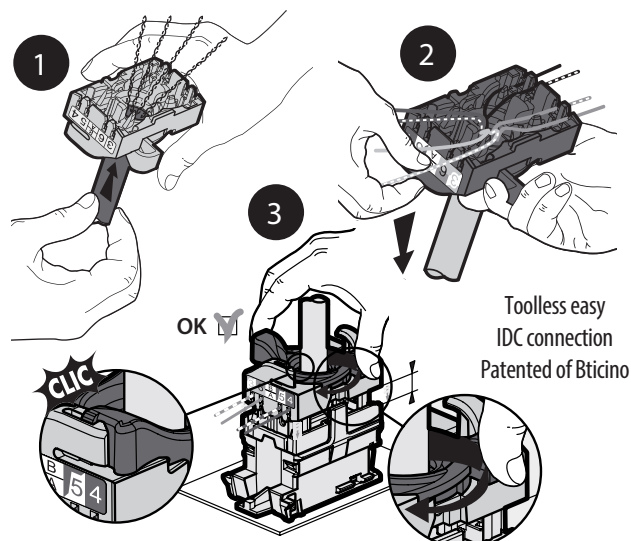


RJ CONNECTORS




Item	RJ45 CONNECTORS (UTP)	
	RJ 45 data transmission/telephone connectors. Specially designed for data and telephone transmission. These connectors are widely used for computer networks with a 4-pair cable.	
	Category	Connection type
☐ N4279C5E ☐ NT4279C5E ☐ L4279C5E	 5E	Bticino (ITALY) Socket Toolless easy IDC Connection Exclusive patented of Bticino
☐ N4279C6 ☐ NT4279C6 ☐ L4279C6	 6	
☐ N4279C6A ☐ NT4279C6A ☐ L4279C6A	 6A	
☐ N4262C5E ☐ NT4262C5E ☐ L4262C5E	 5E	ORTRONICS (USA) Socket Keystone attach 110 IDC classic connection
☐ N4262C6 ☐ NT4262C6 ☐ L4262C6	 6	
☐ N4261AT5 ☐ NT4261AT5 ☐ L4261AT5	 5E	
☐ N4261AT6 ☐ NT4261AT6 ☐ L4261AT6	 6	

110 IDC classic connection

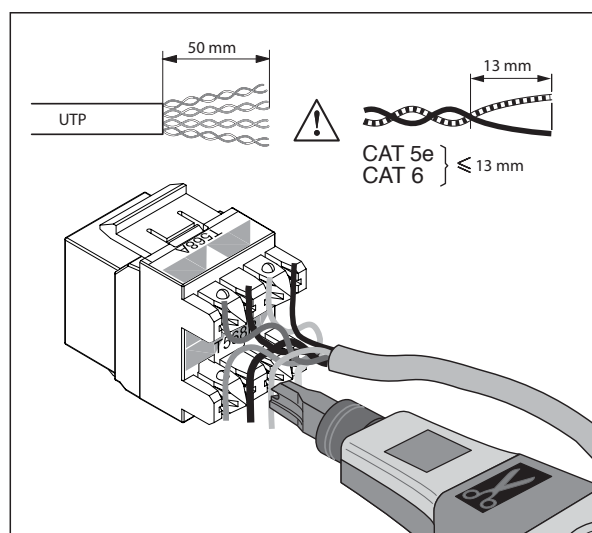

AUDIBLE AND LUMINOUS SIGNALLING DEVICES



N4351/230



NT4355/12



L4356/230



L4371V



N4371R

Item	BELLS
☐ N4351/230 ☐ NT4351/230 ☐ L4351/230	 bronze bell 230 Va.c. - 8 VA - 80 dB - 50 and 60 Hz
☐ N4355/12 ☐ NT4355/12 ☐ L4355/12	 electronic bell - 3 different sounds - with front volume adjustment - 12 Va.c./d.c. - 2 modules
BUZZERS	
☐ N4356/230 ☐ NT4356/230 ☐ L4356/230	 buzzer 230 Va.c. - 8 VA - 75 dB - 50 and 60 Hz

PILOT LIGHTS	
☐ N4371T ☐ NT4371T ☐ L4371T	 lampholder with transparent diffuser - for LED items LN4742V12T, LN4742V127T and LN4742V230T
☐ N4371R ☐ NT4371R ☐ L4371R	 lampholder with red diffuser - for LED items LN4742V12T, LN4742V127T and LN4742V230T
☐ N4371V ☐ NT4371V ☐ L4371V	 lampholder with green diffuser - for LED items LN4742V12T, LN4742V127T and LN4742V230T
☐ N4372AV ☐ NT4372AV ☐ L4372AV	 double lampholder with 2 diffusers: 1 orange + 1 green - for 2 LED items LN4742V12T, LN4742V127T and LN4742V230T

PUSH BUTTON OUTSIDE ...

... BUZZER OR BELL INSIDE



Choose between
3 ringtones

LN 4040



N4355/12



N4356/230

ELECTRICAL SAFETY DEVICES



N4301/6



L4356

Item AUTOMATIC THERMAL MAGNETIC CIRCUIT BREAKERS

☐ N4301/6 ☐ NT4301/6 ☐ L4301/6	two-pole automatic thermal magnetic circuit breakers with a 6 A 230 Va.c. protected pole - indicator of open/closed contacts - breaking capacity 1500 A 230 Va.c.
☐ N4301/10 ☐ NT4301/10 ☐ L4301/10	circuit breakers as above 10 A - breaking capacity 3000 A 230 Va.c.
☐ N4301/16 ☐ NT4301/16 ☐ L4301/16	circuit breakers as above 16 A - breaking capacity 3000 A 230 Va.c.

FUSE CARRIERS

☐ N4321 ☐ NT4321 ☐ L4321	fuse carrier for fuses 5x20 and 6.3x 32 - max. 10 250 Va.c.
☐ N4322 ☐ NT4322 ☐ L4322	fuse carrier for 16 A

SURGE PROTECTIVE DEVICES

☐ N4536 ☐ NT4536 ☐ L4536	1 P surge protective devices to be combined with the users mains socket - rated discharge voltage $I_n=1$ kA - max. current $I_{max}=2$ kA - max. protection voltage $U_p=1$ kV - rated voltage $U_n=110-230$ Va.c. - max. permanent voltage $U_c=250$ Va.c.
---	--

TEMPERATURE CONTROL



N4441



N4451



L4450

Item ELECTRONIC THERMOSTATS

☐ N4441 ☐ NT4441 ☐ L4441	electronic room thermostat - relay output with 1 switching contact 2 A 250 Va.c. - power supply 230 Va.c.
---	--

TIMER THERMOSTATS

☐ N4451 ☐ NT4451 ☐ L4451	flush mounted daily/weekly timer thermostat for heating and cooling systems. Three selectable temperatures during the 24 h period - Auto, Manual, Holiday, Antifreeze Operation. Backlighted display - power supply with battery: 2 x 1.5 V - remote activation using the remote control - possibility of connecting an external probe - output: contact in exchange 5(3) A
☐ N4450 ☐ NT4450 ☐ L4450	wall mounted daily/weekly electronic timer thermostat for heating and cooling systems. Three selectable temperatures during the 24 h period - Auto, Manual, Holiday, Jolly, Antifreeze Operation. Power supply with battery: 2x1.5 V - possibility of connecting an external temperature probe - output contact in exchange 1 A cosφ 0.5



INTERNATIONAL SOCKET,
BEST SOLUTION FOR INTERNATIONAL BUSINESS

SURGE PROTECTION,
PROTECT YOUR DEVICE

CIRCUIT BREAKER,
SAFETY FIRST ALSO AT THE OFFICE

MULTIMEDIA SOCKETS



N4294



NT4268ST



NT4268LC



NT4285



L4262/11



L4269R

Item	AUDIO VIDEO CONNECTORS	
☐ N4269R ☐ NT4269R ☐ L4269R		double RCA connector – red and yellow collars – terminations to be welded
☐ N4294 ☐ NT4294 ☐ L4294		connector for loudspeakers
☐ N4269HJT ☐ NT4269HJT ☐ L4269HJT		connector - jack 3.5
☐ N4269RWT ☐ NT4269RWT ☐ L4269RWT		connector - RCA x 2
☐ N4269VGAT ☐ NT4269VGAT ☐ L4269VGAT		connector - HD15
☐ N4269RWYT ☐ NT4269RWYT ☐ L4269RWYT		RCA x 3 connector
☐ N4269HDMIT ☐ NT4269HDMIT ☐ L4269HDMIT		HDMI connector
☐ N4269USBT ☐ NT4269USBT ☐ L4269USBT		USB connector

Item	SPECIAL CONNECTORS	
☐ N4292 ☐ NT4292 ☐ L4292		standard five pole DIN connector for HI-FI and similar – connection to be welded
☐ N4293 ☐ NT4293 ☐ L4293		2 pole DIN connector – connection to be welded

Item	CONNECTORS FOR OPTICAL FIBER CONNECTIONS	
☐ N4268ST ☐ NT4268ST ☐ L4268ST		coupling connector for optical fiber - ST cable socket - duplex
☐ N4268SC ☐ NT4268SC ☐ L4268SC		coupling connector for optical fiber - SC cable socket - duplex
☐ N4268LC ☐ NT4268LC ☐ L4268LC		connector for fiber - optic cable sealing and type LC - duplex

Item	VOLUME CONTROL	
☐ N4269VL ☐ NT4269VL ☐ L4269VL		Volume control



MULTIMEDIA AT HOME



HOTEL OFFER RANGE

This page lists the devices specifically intended for hotel room services.

The BTicino hotel room offer range, and in more general terms for the hotel sector, includes however many more devices that are also used in other sector, and are therefore listed in various sections throughout this catalogue.

Some of them are, for example:

- comfort devices = light, curtain, and scenario controls with dedicated symbols. Also, thermostats and temperature probs with knobs.
- audio and video devices = connectors for every need and sound signalling devices
- safety devices = step lights and emergency lamps.



L4545



LN4549



NT4547

Item	BADGE-HOLDER POCKET	
☐ LN4549		badge holder pocket for the power supply inside the hotel room - slot light with built-in lamp - 30 second switch-off delay - power supply 230 Va.c. - 2 modules - to be completed with front cover in the desired look
☐ LN4548		badge holder pocket for the power supply inside the hotel room with RFID technology recognition - slot light with built-in lamp - 30 second switch-off delay - power supply 230 Va.c. - 2 modules - to be completed with front cover in the desired look

FRONT COVERS FOR BADGE-HOLDER POCKETS		
☐ N4547 ☐ NT4547 ☐ L4547		front cover for traditional or My Home badge-holder pocket - the installation is compatible with 2 module boxes only
☐ N4551 ☐ NT4551 ☐ L4551		front cover for traditional or My Home badge-holder pocket - 3 modules



N4033



N4177



N4373H



N4028H

Item	LAMPHOLDER FOR OFF-DOOR SIGNALLING	
☐ N4373H ☐ NT4373H ☐ L4373H		off-door lampholder with double optical signalling: do not disturb and make-up the room - use 2 LEDs item LN4742V12T (12 V)

☐ N4028H ☐ L4028H		changeover switch 1P 16A - 250V a.c. double pushbutton 1-0-2 for Hotel installation - room condition indication: "PLEASE DO NOT DISTURB" and "PLEASE MAKE UP THE ROOM". To use with pilot light item. Items conform to BS EN 60 669-1
--	---	---

SHAVER SOCKETS		
☐ N4177 ☐ NT4177 ☐ L4177		shaver socket with insulation transformer - input voltage 230 Va.c. @ 50/60 Hz - output voltage 115/230 Va.c. 20 VA

***Note:** when installed with Livinglight AIR, the use of the box extension is necessary, in order to make easy the wiring

CORD PUSHBUTTONS		
☐ N4033 ☐ NT4033 ☐ L4033		cord pushbutton 1 P NO 10 A for bathroom alarm



MULTIMEDIA AT THE HOTEL



CONNECTION AND ENTERTAINMENT
EVERYWHERE

ACCESSORIES



LN4742V12T



LN4742V230

Item	LEDs	
○ LN4742V230 ○ LN4742V12		LED for rocker controls 230 V or 12/24 V - amber
○ LN4742V230T ○ LN4742V12T		white LED for pilot lights and BS 230 V or 12/24 V devices
○ LN4743/230A ○ LN4743/12A		LED for axial control 230 V a.c. 12/24V - amber
○ LN4743/230T ○ LN4743/12T		LED for axial control 230 V a.c. 12/24V - White

BLANK PLATES



N4950



L4951

Item	BLANK PLATES	
□ N4950 ■ NT4950 ■ L4950		blank plate - 1 module
□ N4951 ■ NT4951 ■ L4951		blank plate with knockout - 2 modules
□ N4953 ■ NT4953 ■ L4953		blank plate with output Ø 9 mm - with clamp - 1 module
□ N4954 ■ NT4954 ■ L4954		blank plate with output Ø 9 mm - with clamp - 2 modules

LED SELECTION TABLE FOR DEVICE LIGHTING

Lightable devices / Item		What LEDs for lighting
Switches	Switches	
1 module	2 modules	
L4001/0		LN4742V12T (12/24 V) LN4742V230 (230 V)
L4003/0		
LN4004		
N/NT/L4001N	N/NT/L4001M2N	
N/NT/L4003N	N/NT/L4003M2N	
N/NT/L4004N	N/NT/L4004M2N	
N/NT/L4002N		
Pushbuttons		
N/NT/L4038R		LN4742V12T (12/24 V) LN4742V230T (230 V)
LN4040		
L4005/0		
N/NT/L4005N	N/NT/L4005M2N	
N/NT/L4044N		
Pilot light		
N/NT/L4371A		LN4742V12T (12/24 V) LN4742V230T(230 V)
N/NT/L4371T		
N/NT/L4371R		
N/NT/L4371V		
N/NT/L4372AV (2 LED)		
N/NT/L4372RT (2 LED)		
N/NT/L4373HN (2 LED)		
Axial control devices		
1 module	2 modules	
N/NT/L4051N	N/NT/L4051M2N	LN4743/12A/(12/24V)
N/NT/L4053N	N/NT/L4053M2N	LN4743/230A(230V)
N/NT/L4054N	N/NT/L4054M2N	LN4743/12T/(12/24V)
N/NT/L4055N	N/NT/L4055M2N	LN4743/230T(230V)


CONTROL BACKLIGHTING LED CONNECTION

Note for the connection of 230 V a.c. LEDs for the backlighting of control devices: when LEDs are fitted to help locate the control itself, it must be taken into account that energy saving and fluorescent lamps do not allow in series connection of the LED on the load.


It is therefore necessary to also take a neutral conductor near the control, so that the LED may be connected directly between phase and neutral, and will always be on.

EXAMPLES OF LED CONNECTION ON A SWITCH

function: locating




function: load status LED



2 WIRES DOOR ENTRY SYSTEM


- From villa to small & medium condominium or compound
- Integrated with the most advanced home automation system

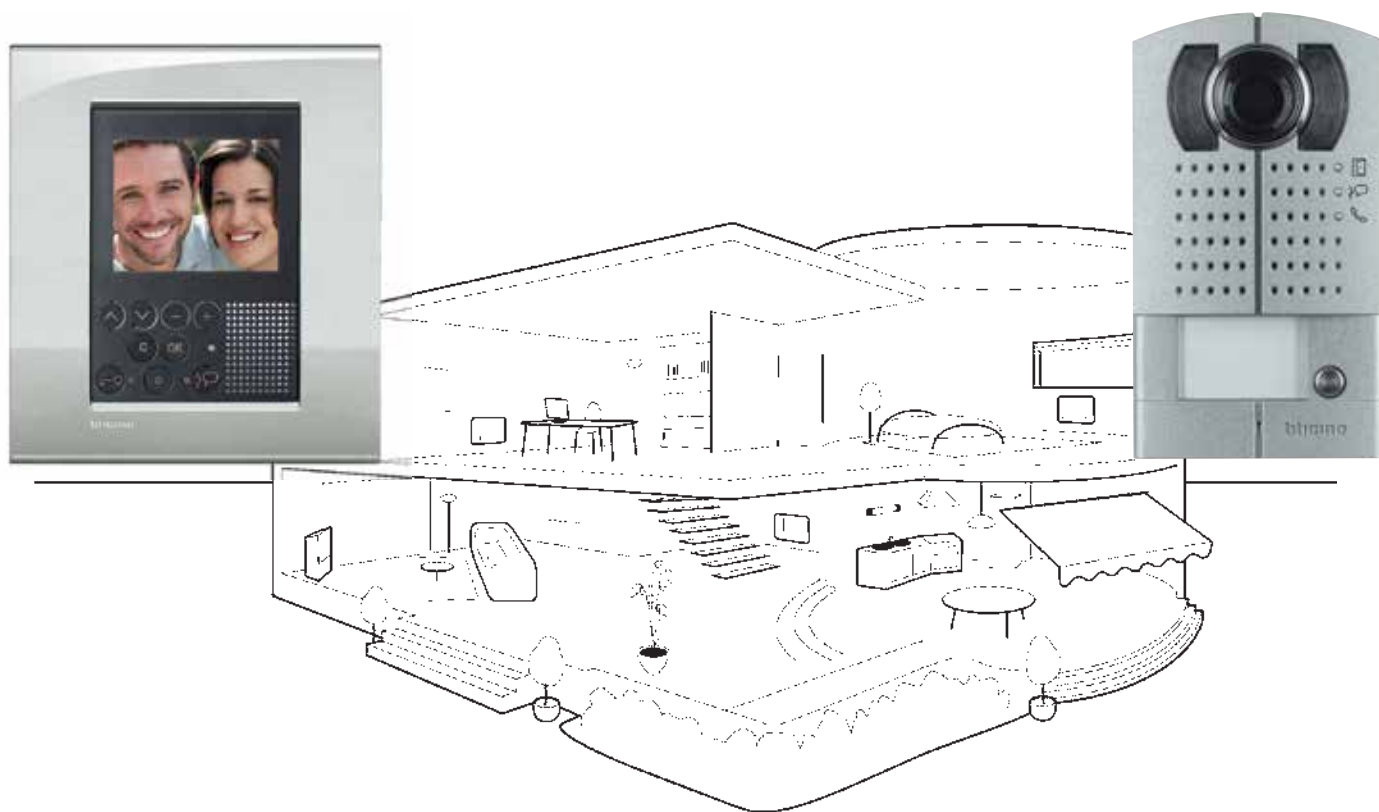

HOME AUTOMATION, THE NATURAL EVOLUTION OF YOUR HOME.



BTicino let you **design** your homespace. A single impulse is now a **Scenario** fitting your **habits** and **desires**.



WITH A SINGLE TOUCH

- Turn on the light
- Switch off the air-con
- Open the curtains
- Put her favorite song on



SPECIAL INSTALLATION



506L
(183.5x90x53.5 mm)



503E
(106x71x52 mm)




PB503N
(110x71x52 mm)
for plasterboard

Item	BOX FOR MASONRY WALL
502E	Plastic box 2 modules
502W	Living plastic box 2 modules - Light air
503E	Living plastic box 3 modules
504E	Living plastic box 4 modules
506L	Living plastic box 7 modules
510L	Living plastic box 1 module
506E	Living plastic box 6 modules
16102	Living plastic box 6x3 modules

Item	BOX FOR PLASTERBOARD WALL
PB502W	Plasterboard box 2 modules - Light air
PB502N	Plasterboard box 2 modules
PB503N	Plasterboard box 3 modules
PB504N	Plasterboard box 4 modules
PB526N	Plasterboard box 3+3 modules
PB506N	Box for plasterboard wall 7 modules



Box extension



LIVINGLIGHT AIR

Item	BOX EXTENSION
○ 503ESE	 adapter, for increasing the depth of 503E flush mounted boxes
○ 504ESE	 adapter, for increasing the depth of 504E flush mounted boxes
○ 506LSE	 adapter, for increasing the depth of 506L flush mounted boxes
○ 506ESE	 adapter, for increasing the depth of 506E flush mounted boxes

These adapters may be used when installing the box. They make wiring easier in case of several cables inside the same box, or for particularly deep devices.

Confer to page 35

WEATHERPROOF



24602N - white



24603L - anthracite

Item	IDROBOX IP55 - PROTECTED COVER
□ 24602N	idrobox weatherproof cover 2 modules - white
■ 24602	idrobox weatherproof cover 2 modules - grey
■ 24602L	idrobox weatherproof cover 2 modules - black
□ 24603N	idrobox weatherproof cover 3 modules - white
■ 24603	idrobox weatherproof cover 3 modules - grey
■ 24603L	idrobox weatherproof cover 3 modules - black



24402



24503




24403

Item	IP40 IDROBOX PROTECTING HOUSING
○ 24401	IP40 composed of base and cover - for 1 module LivingLight
○ 24402	IP40 composed of base and cover - for 2 module LivingLight
○ 24403	IP40 composed of base and cover - for 3 module LivingLight

Item	IP55 IDROBOX PROTECTING HOUSING
○ 24501	IP55 enclosure consists of a base and cover - for 1 module LivingLight
○ 24502	IP55 enclosure consists of a base and cover - for 2 modules LivingLight
○ 24503	IP55 enclosure consists of a base and cover - for 3 modules LivingLight
○ 24504	IP55 enclosure consists of a base and cover - for 4 modules LivingLight

SPECIAL INSTALLATION


Item	VERTICAL INSTALLATION PLATES
☐ LND4811BI ☒ LND4811TE ☒ LND4811AR	LL - cover plate for rail 1P white LL - cover plate for rail 1P tech LL - cover plate for rail 1P anthracite
☐ LND4812BI ☒ LND4812TE ☒ LND4812AR	LL - cover plate for rail 1+1P white LL - cover plate for rail 1+1P tech LL - cover plate for rail 1+1P anthracite

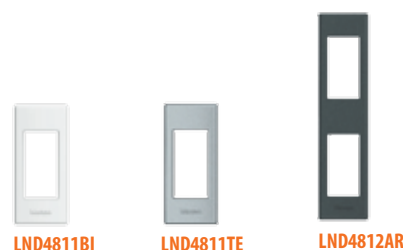

Item	VERTICAL INSTALLATION BOXES
○ 510L	box for masonry wall 1 modules size 27 x 50 x 37 mm.
○ 510LN	LL - box 1 module size 27 x 50 x 37 mm.



Item	WALL MOUNTED MULTIBOXES
☐ N4714 ☒ L4714	Light - wall box 14 modules LivInt - wall box 14 modules
☐ 150418BA ☒ 150418GR	Interlink - 18 mod. consumer unit white Interlink - 18 mod. consumer unit black



150418BA with supports and cover plates (173x247x65)



L4714 - with support and cover plate (215x215x60)

Item	WALL MOUNTED BOXES
○ 502BI	universal wall-mounting box 2P white
○ 503BI	universal wall-mounting box 3P white
○ 503BP	surface box 2 and 3 modules - 114x79x46 mm.
○ 504BI	universal wall-mounting box 4P white



502BI*



503BI*



503BP

Item	WALL MOUNTED BOXES - BLACK
○ 502LP	wall mounting box 2m black
○ 503LP	wall mounting box 3m black
○ 504LP	wall mounting box 4m black



502LP



503LP



504LP

Item	DESK DEVICE
☐ 150433 ☒ 150434 ☒ 150432	Interlink - Supporting frame 4P Light Interlink - Supporting frame 4P Light Tech Interlink - Supporting frame 4P Living Int



150433 white



150432 anthracite
150434 Tech

LIGHT COVER PLATES

METALS


Material: zamak




Ice gold -OA



Bronze -BZ

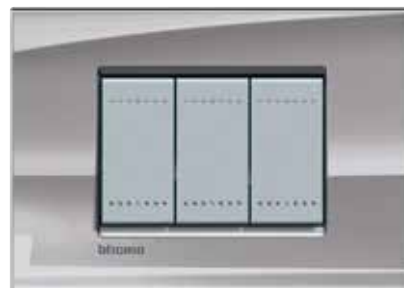

Nickel -NS

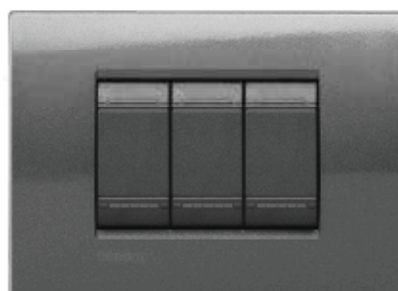

Steel -AC



Moonlight -GL

NATURALIA

Material: zamak



Native -NA



Silver -AG



Brushed steel -ACS

SILK

Material: zamak



Park -PK



Square -SQ



Brick -RK



Avenue -AE



Club -CB

SQUARE COVER PLATE CODES

2 modules - [LNA4802...](#)
 2 modules centered - [LNA4819...](#)
 3 modules - [LNA4803...](#)
 4 modules - [LNA4804...](#)
 7 modules - [LNA4807...](#)
 3+3 modules - [LNA4826...](#)

DEEP Material: polymer plastic			
KRISTALL Material: polymer plastic			
NEUTRAL Material: polymer plastic			
ESSENCES Material: solid wood			

LIGHT COVER PLATES

Table for selecting codes


MODULES							
		2	2 centered	3	4	7	3 + 3
METALS (zamak)							
	Ice gold	LNA4802OA	LNA4819OA	LNA4803OA	LNA4804OA	LNA4807OA	LNA4826OA
	Bronze	LNA4802BZ	LNA4819BZ	LNA4803BZ	LNA4804BZ	LNA4807BZ	LNA4826BZ
	Nickel	LNA4802NS	LNA4819NS	LNA4803NS	LNA4804NS	LNA4807NS	LNA4826NS
	Steel	LNA4802AC	LNA4819AC	LNA4803AC	LNA4804AC	LNA4807AC	LNA4826AC
	Moolight silver	LNA4802GL	LNA4819GL	LNA4803GL	LNA4804GL	LNA4807GL	LNA4826GL
NATURALIA (zamak)							
	Native	LNA4802NA	LNA4819NA	LNA4803NA	LNA4804NA	LNA4807NA	LNA4826NA
	Silver	LNA4802AG	LNA4819AG	LNA4803AG	LNA4804AG	LNA4807AG	LNA4826AG
	Brushed steel	LNA4802ACS	LNA4819ACS	LNA4803ACS	LNA4804ACS	LNA4807ACS	LNA4826ACS
SILK (zamak)							
	Park	LNA4802PK	LNA4819PK	LNA4803PK	LNA4804PK	LNA4807PK	LNA4826PK
	Square	LNA4802SQ	LNA4819SQ	LNA4803SQ	LNA4804SQ	LNA4807SQ	LNA4826SQ
	Brick	LNA4802RK	LNA4819RK	LNA4803RK	LNA4804RK	LNA4807RK	LNA4826RK
	Avenue	LNA4802AE	LNA4819AE	LNA4803AE	LNA4804AE	LNA4807AE	LNA4826AE
	Club	LNA4802CB	LNA4819CB	LNA4803CB	LNA4804CB	LNA4807CB	LNA4826CB
DEEP (polymer plastic)							
	Green	LNA4802VD	LNA4819VD	LNA4803VD	LNA4804VD	LNA4807VD	LNA4826VD
	Orange	LNA4802OD	LNA4819OD	LNA4803OD	LNA4804OD	LNA4807OD	LNA4826OD
	Blue	LNA4802AD	LNA4819AD	LNA4803AD	LNA4804AD	LNA4807AD	LNA4826AD
KRISTALL (polymer plastic)							
	London fog	LNA4802KF	LNA4819KF	LNA4803KF	LNA4804KF	LNA4807KF	LNA4826KF
	Aquamarine	LNA4802KA	LNA4819KA	LNA4803KA	LNA4804KA	LNA4807KA	LNA4826KA
	Cold grey	LNA4802KG	LNA4819KG	LNA4803KG	LNA4804KG	LNA4807KG	LNA4826KG
NEUTRAL (polymer plastic)							
	Anthracite	LNA4802AR	LNA4819AR	LNA4803AR	LNA4804AR	LNA4807AR	LNA4826AR
	White	LNA4802BI	LNA4819BI	LNA4803BI	LNA4804BI	LNA4807BI	LNA4826BI
	Tech	LNA4802TE	LNA4819TE	LNA4803TE	LNA4804TE	LNA4807TE	LNA4826TE
WOOD							
	Cherrywood	LNA4802LCA	LNA4819LCA	LNA4803LCA	LNA4804LCA	LNA4807LCA	LNA4826LCA
	Bamboo	LNA4802LBA	LNA4819LBA	LNA4803LBA	LNA4804LBA	LNA4807LBA	LNA4826LBA
	Walnut	LNA4802LNC	LNA4819LNC	LNA4803LNC	LNA4804LNC	LNA4807LNC	LNA4826LNC
SUPPORTS							
	Fixing with screws	LN4702	LN4719	LN4703	LN4704	LN4707	LN4726
	Fixing with clips	LN4702G	LN4719G				

KRISTALL

Neutral, transparent, easy to be customised. From total camouflage to vivid graphic impact. KRISTALL is ideal for spaces furnished in a particular style, to camouflage switches and sockets on wall with decorative coverings or finishes. The plate and switch can be personalised with wallpaper inserts or graphic decorations.

ITEMS FOR THE CUSTOMISATION OF THE LIGHT POINT

Item	Customisable transparent key cover for rocker control devices	
○ N4932		1 module
○ N4932/2		2 modules
○ N4932/3		3 modules
Customisable transparent cover plates		
○ LND4802KR		2 modules
○ LND4819KR		2 modules
○ LND4803KR		3 modules
○ LND4804KR		4 modules
○ LND4807KR		7 modules
○ LND4826KR		3 + 3 modules

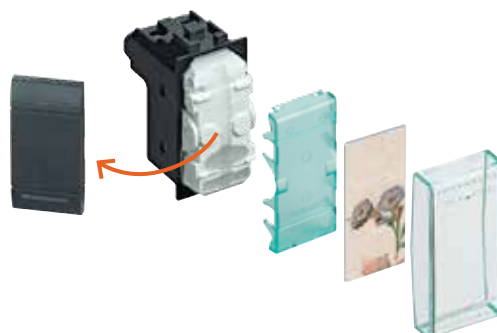

LIVING INTERNATIONAL

Cover plate colours

METALLIC



Light aluminium - AL



Dark steel - AC



Light titanium - TC



Oxidized bronze - BO



Solid black - NR

SHINY



Bright chrome - CR



True gold - OR

SPECIAL



Brushed steel - ACS



Graphite - GF



Black graphite - GFN



Bakelite - BK

LIVINGLIGHT ROUND COVER PLATES CODES

2 modules - L4802...

3 modules - L4803...

4 modules - L4804...

7 modules - L4807...

3+3 modules - L4826...



* (not available in the modularity 3+3)

NOTE for new plates: White plate with white inner frame, plates Tech, Chrome and Brushed steel with Tech inner frame

LIVING INTERNATIONAL: table for selecting codes

		MODULES				
		2	3	4	7	3 + 3
METALLIC						
	Light aluminium	L4802AL	L4803AL	L4804AL	L48027L	L4826AL
	Dark steel	L4802AC	L4803AC	L4804AC	L48027C	L4826AC
	Light titanium	L4802TC	L4803TC	L4804TC	L4807TC	L4826TC
	Oxidized bronze	L4802BO	L4803BO	L4804BO	L4807BO	L4826BO
	Solid black	L4802NR	L4803NR	L4804NR	L4807NR	L4826NR
SHINY						
	Bright chrome	L4802CR	L4803CR	L4804CR	L4807CR	L4826CR
	True gold	L4802OR	L4803OR	L4804OR	L4807OR	L4826OR
SPECIAL						
	Brushed steel	L4802ACS	L4803ACS	L4804ACS	L4807ACS	L4826ACS
	Graphite	L4802GF	L4803GF	L4804GF	L4807GF	L4826GF
	Black graphite	L4802GFN	L4803GFN	L4804GFN	L4807GFN	L4826GFN
	Bakelite	L4802BK	L4803BK	L4804BK	L4807BK	
TECH						
	Tech	L4802TE	L4803TE	L4804TE	L4807TE	L4826TE
	Chrome	L4802CT	L4803CT	L4804CT	L4807CT	L4826CT
	Brushed steel	L4802AST	L4803AST	L4804AST	L4807AST	L4826AST
POLYMER						
	Dark steel	L4802PA	L4803PA	L4804PA	L4807PA	
	White	L4802PB	L4803PB	L4804PB	L4807PB	
	All White	L4802BI	L4803BI	L4804BI	L4807BI	
SUPPORTS						
Supports		L4702-L4702G	LN4703	LN4704	LN4707	LN4726

MONOCHROME

Material: zamak



Pure white - **BN**



Tech - **TE**



Anthracite - **AR**

SHINY

Material: zamak



Pewter - **PT**



Palladium - **PL**



Gold mat - **OF**



Nickel mat - **NK**

SOFT

Material: zamak



Street - **ST**



Clay - **CY**



Sand - **SB**



Blue moon - **BM**

AIR COVER PLATE CODES

- 2 modules - **LNC4802...**
- 3 modules - **LNC4803...**
- 4 modules - **LNC4804...**
- 7 modules - **LNC4807...**
- 3+3 modules - **LNC4826...**


 Brushed Nickel - **NIS**

 Brushed Titanium - **TIS**


 Brushed Chrome - **CRS**

Cover plates: table for selecting codes


		MODULES				
		2	3	4	7	3 + 3
MONOCHROME (zamak)						
	Pure white	LNC4802BNL	LNC4803BN	LNC4804BNL	LNC4807BN	LNC4826BN
	Tech	LNC4802TEL	LNC4803TE	LNC4804TEL	LNC4807TE	LNC4826TE
	Anthracite	LNC4802ARL	LNC4803AR	LNC4804ARL	LNC4807AR	LNC4826AR
BRUSHED (zamak)						
	Brushed Nickel	LNC4802NIS	LNC4803NIS	LNC4804NIS	LNC4807NIS	LNC4826NIS
	Brushed Titanium	LNC4802TIS	LNC4803TIS	LNC4804TIS	LNC4807TIS	LNC4826TIS
	Brushed Chrome	LNC4802CRS	LNC4803CRS	LNC4804CRS	LNC4807CRS	LNC4826CRS
SHINY (zamak)						
	Pewter	LNC4802PT	LNC4803PT	LNC4804PT	LNC4807PT	LNC4826PT
	Palladium	LNC4802PL	LNC4803PL	LNC4804PL	LNC4807PL	LNC4826PL
	Gold mat	LNC4802OF	LNC4803OF	LNC4804OF	LNC4807OF	LNC4826OF
	Nickel mat	LNC4802NK	LNC4803NK	LNC4804NK	LNC4807NK	LNC4826NK
SOFT (zamak)						
	Street	LNC4802ST	LNC4803ST	LNC4804ST	LNC4807ST	LNC4826ST
	Clay	LNC4802CY	LNC4803CY	LNC4804GCY	LNC4807CY	LNC4826CY
	Sand	LNC4802SB	LNC4803SB	LNC4804SB	LNC4807SB	LNC4826SB
	Blue moon	LNC4802SBM	LNC4803BM	LNC4804BM	LNC4807BM	LNC4826BM
SUPPORTS						
Supports		LN4702C	LN4703C	LN4704C	LN4707C	LN4726C

INSTALLATION SYSTEM

2 MODULES

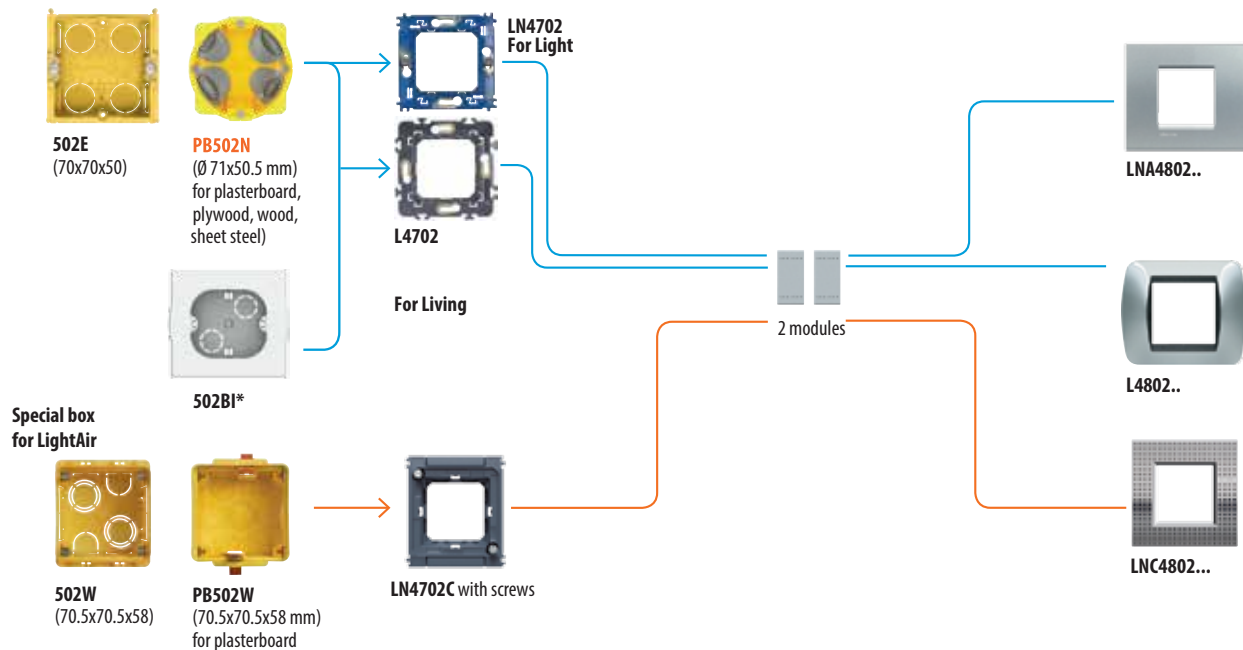

WEATHER PROOF

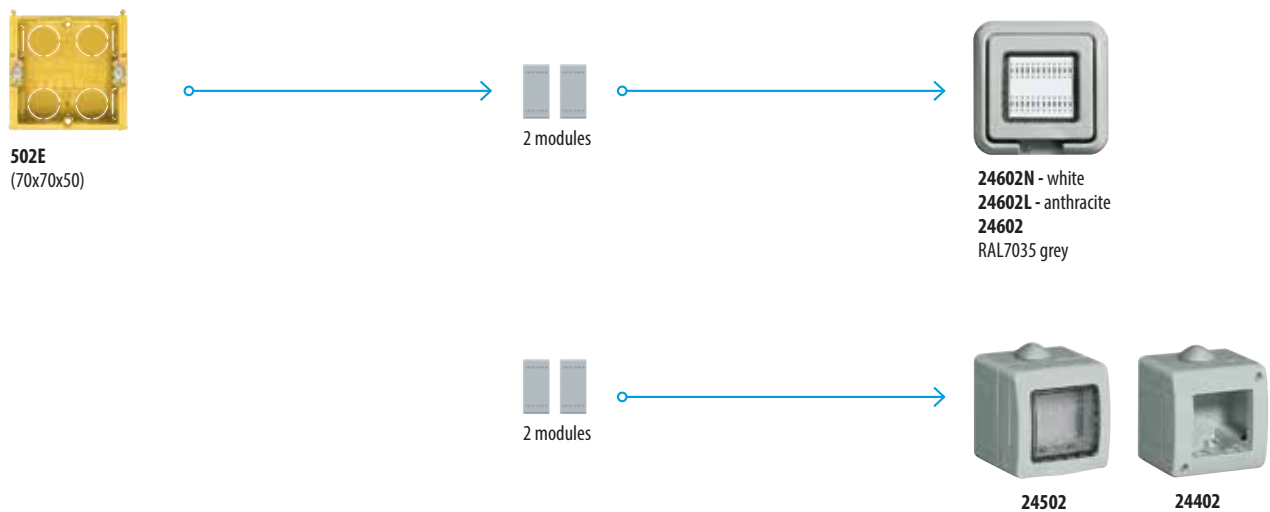

LIVING LIGHT

can be installed using normal flush mounted boxes and 2, 3, 4, 7, and 3+3 module supports. The light point can be completed with square or round cover plates depending on personal taste.

LIGHT^{AIR}


LIVINGLIGHT AIR features reduced protrusion from the wall of the device/cover plate.

- 3, 4, 7 and 3+3 module installation: traditional BTicino flush mounted boxes (503E), or boxes with minimum depth 50 mm.


Suggestions:

- new systems: considering the back position of the mechanisms inside the boxes, for masonry walls the use of box extensions is recommended, for better comfort and wiring
- existing systems: check that the depth of the box is at least 50 mm.

3 MODULES

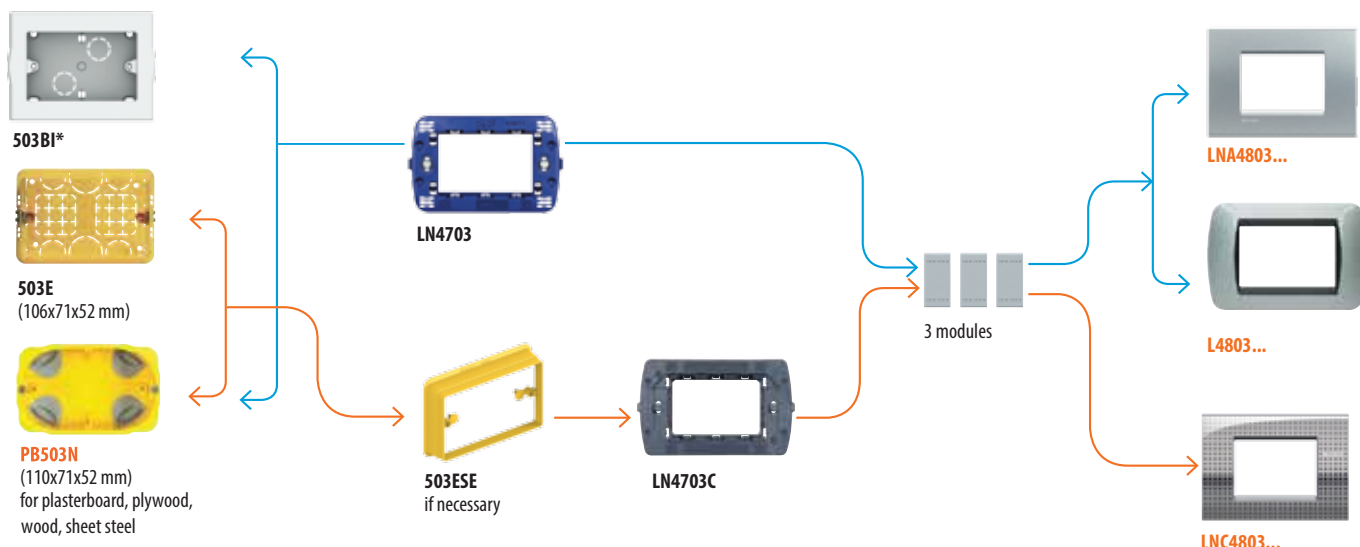


WEATHER PROOF

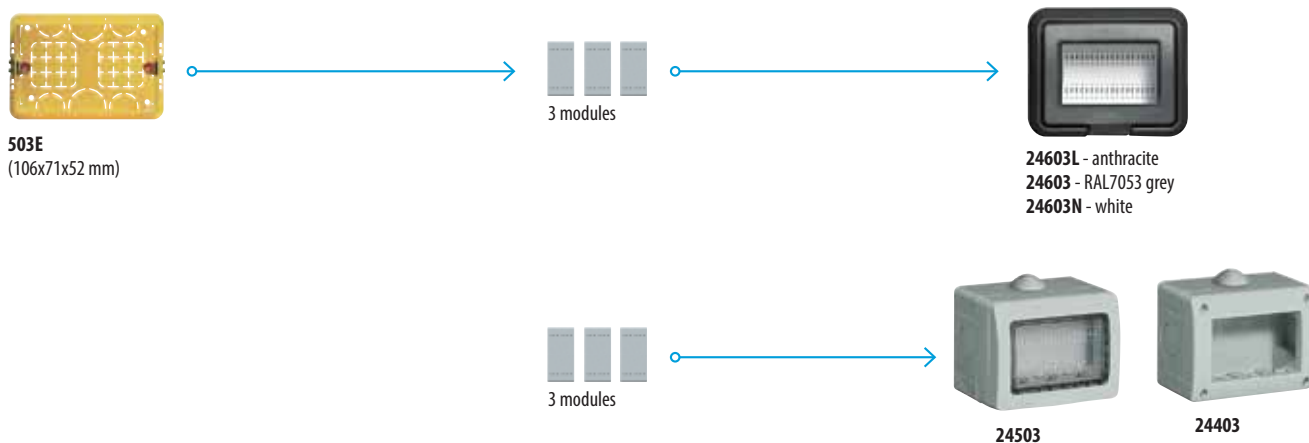


PRODUCTS FOR WHICH THE USE OF THE BOX EXTENSION IS NECESSARY, WHEN INSTALLED WITH LIVINGLIGHT AIR

Box extension	Products to combine	Item
	10 A 2 modules	N4402N NT4402N L4402N
	1 module resistive dimmer	N4406 NT4406 L4406
	10 A 1 module axial pushbutton + MH BASIC interface	N4055A NT4055A L4055A
	10 A 2 module axial pushbutton + MH BASIC interface	N4055M2A NT4055M2A L4055M2A
	230 V a.c. shaver socket	N4177 NT4177 L4177
	emergency lamp 3 hours - 4 modules	L4384/3
	emergency lamp 3 hours - 6 modules	L4386/3
	emergency lamp always on - 3 hours - 6 modules	L4386/3L

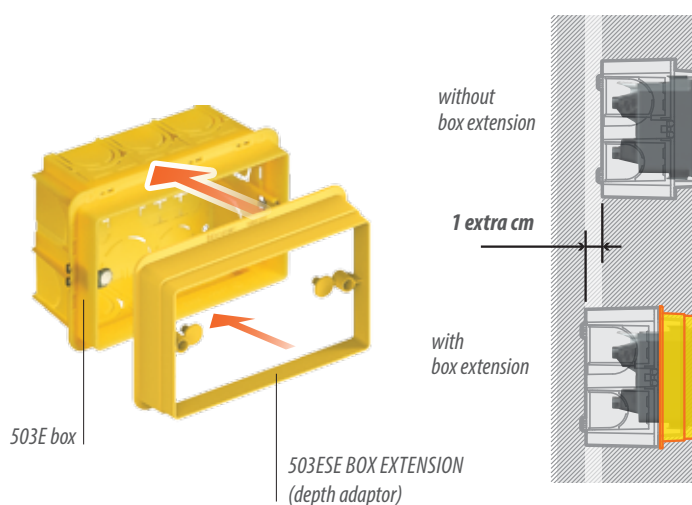

INSTALLATION SYSTEM


4 MODULES

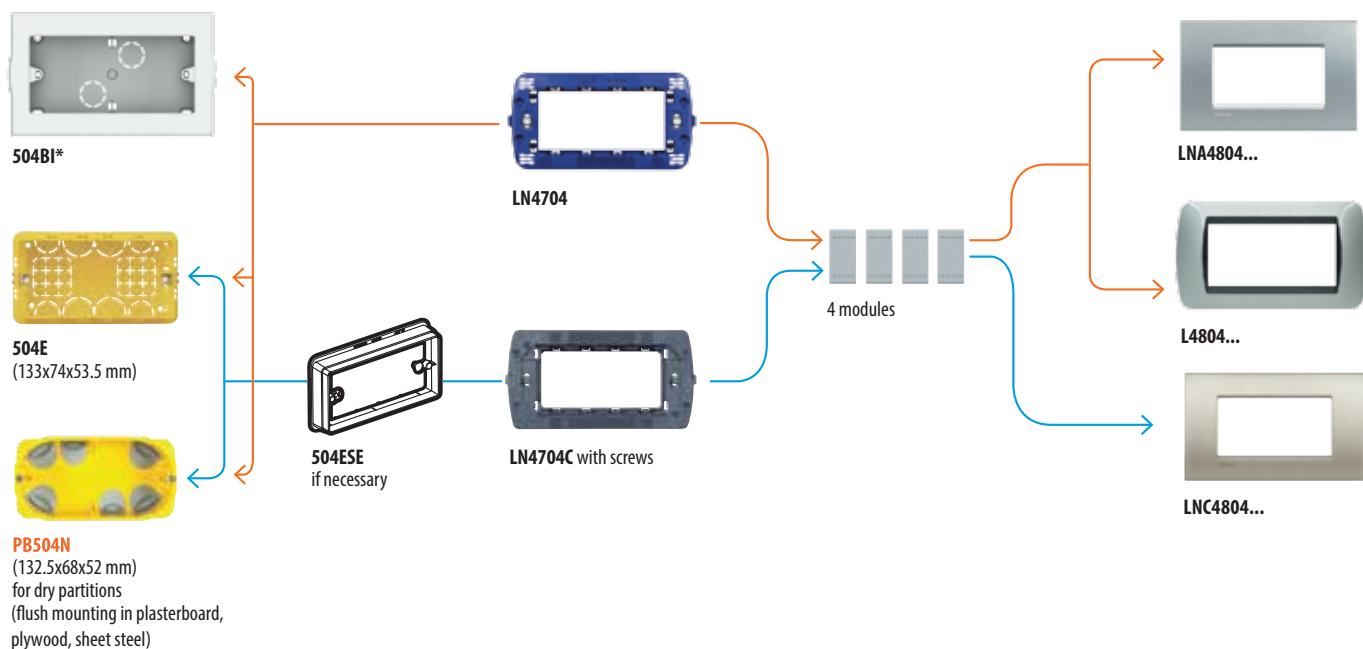


WEATHER PROOF



7 MODULES

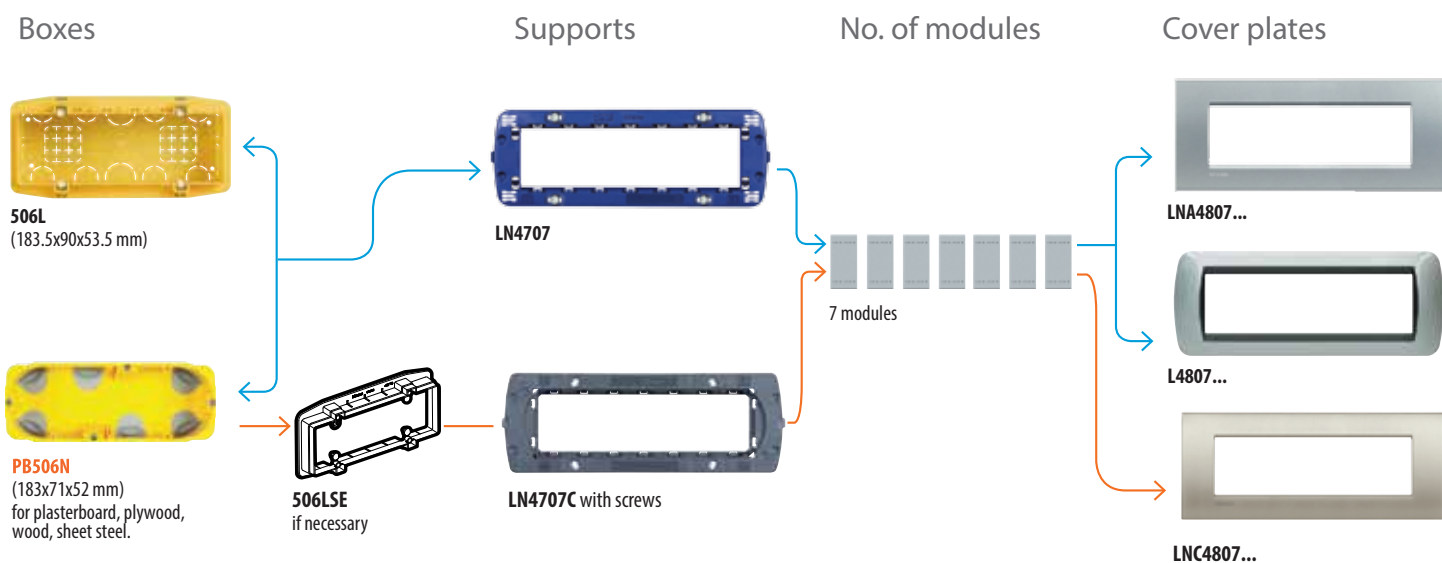

3+3 MODULES

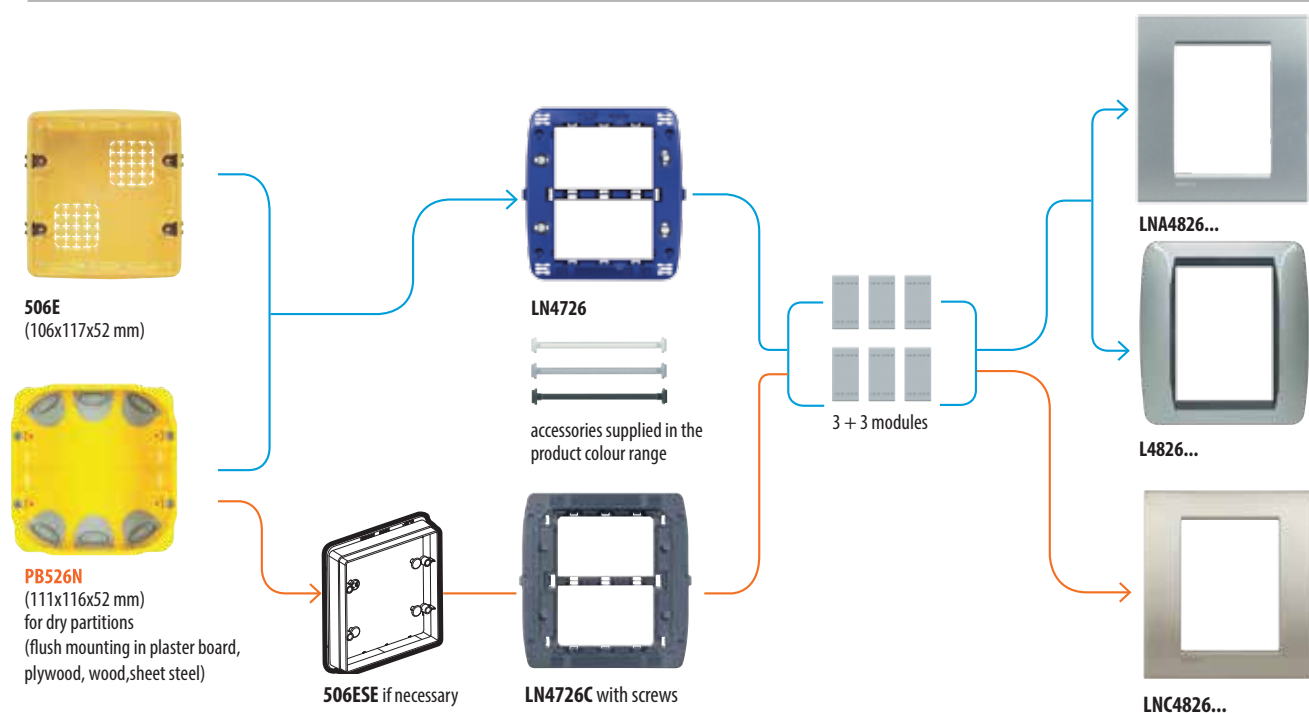

INSTALLATION ON RAILS

Boxes




No. of modules

ON PROFILES



Cover plates with support

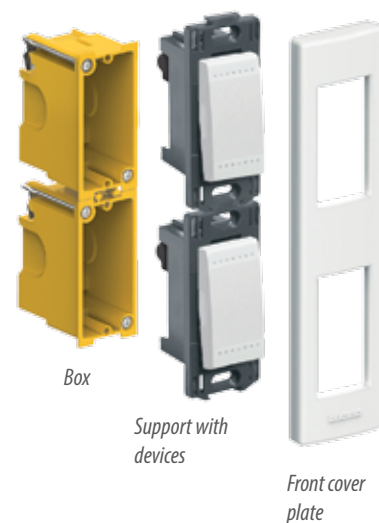

INSTALLATION IN MULTIBOX BOXES

Boxes




Frame



Supports



No. of modules



Cover plates



BTicino Concept Store | Bangkok



TRAINING CENTER | BANGKOK

VISIT OUR SHOWROOMS

Monday to Friday (10 a.m. - 5 p.m.)

BTicino (Thailand) Limited

Bangkok | Office
10th F Ploenchit Center,
2 Sukhumvit Road,
Klongtoey, Bangkok 10110
Tel. +66 (0) 2 656 9162 - 7
Fax. +66 (0) 2 656 9197

Bangkok | Concept Store
G Floor Ploenchit Center

Bangkok | Training Center
12th Floor Ploenchit Center



bticino
A Group Brand | **legrand**

BTicino (Thailand) Limited reserves the right to change specifications, designs and prices without notice. All illustrations and descriptions are for pure guidance only. ขอสงวนสิทธิ์ในการเปลี่ยนแปลงรายละเอียด การออกแบบ และราคาของสินค้า โดยไม่ต้องแจ้งให้ทราบล่วงหน้า - ราคาสินค้ายังไม่รวมภาษีมูลค่าเพิ่ม